

Secure Mobile Access 1000 Series (SMA 6210, 7210, 8200v)

Empowering global enterprises with a secure and advanced remote workforce solution

The SMA 1000 series is designed as an advanced secure access gateway for medium enterprises, multi-national corporations and managed security service providers (MSSPs). The series, which includes the SMA 6210, 7210 and 8200v, feature built-in multi-layer security to protect high-value corporate assets and enable users to work from anywhere and with any devices securely.

For mission-critical infrastructure, the addition of Central Management Server (CMS) for SMA provides business continuity with global traffic optimization, instant capacity upscaling, and dynamic allocation of pooled licenses.

CMS for SMA is also a powerful system that simplifies the management of global network of SMA 1000 clusters.

HIGHLIGHTS

- Supports VMWare ESXi, Hyper-V, KVM, AWS and Azure for hybrid-cloud deployments
- User-installable clients are available for macOS, Win 10, Linux, ChromeOS, Android and iOS operating systems
- Every device is interrogated by Advanced Endpoint Control (EPC) to prevent malware from entering the network
- Network access is granted only after EPC has verified that the device has the latest OS patches and free of malware.
- Access is limited to only trusted users and devices, using Context-aware Authorization and Multi-Factor Authentication
- Supports clientless Zero-Trust Access via a web-browser for convenient use with any public device.
- Comes standard with secure clientless (web) access to resources via **HTML5** browser agents
- Helps meet regulatory and federal compliance with FIPS 140-2 Level 2 certification
- Emulates in-office experience and maintains strong security posture with Always-on VPN
- Integrates with the SonicWall Capture ATP, cloud-based multi-engine sandbox, to protect against unknown malware.



SMA 1000 Series Spec Preview. [View full specs »](#)

5Gbps

Max SSL/TLS
Throughput
(SMA 7210)

10,000

Max Concurrent
User Sessions
(SMA 7210)

**Up to 100
SMA 1000s**

Per CMS
Cluster (physical
and/ or virtual
appliances)

**Secure anywhere, anytime access
based on user and device identity,
context and trust.**


sonicwall.com/products

SonicWall SMA 1000 series provides anytime, anywhere and any device access to mission-critical corporate resources. It offers a granular access control policy engine, context-aware device authorization, application-level VPN and advanced authentication with single sign-on. The built-in Zero-Trust Access protects both user and high-value data from breaches, even in a multi-cloud environment.



EMPOWER REMOTE WORKFORCE AND MOBILITY

For organizations wishing to embrace BYOD, flexible working and securely enabling third-party access, the SMA 1000 series delivers a critical enforcement point. With best-in-class security, it minimizes threat surface, secures valuable corporate assets and ensures user confidentiality even in public hotspots. SMA empowers productivity in minutes. IT administrators can conveniently provision identity-based privileges to end-users, secure BYOD policies to protect their corporate networks and data from rogue access and malware.



INTEGRATED ADVANCED SECURITY WITH END-POINT COMPLIANCE (EPC) AND ADVANCED THREAT PROTECTION (ATP)

The SMA 1000 series offers centralized, granular, policy-based enforcement of remote and mobile access to corporate apps and data. SMA easily ensures consistent security policies across thousands of unmanaged devices in any locations.

The solution delivers a single web portal to authenticate users in a hybrid IT environment. In addition, support for modern multi-factor authentications comes standard. Whether the corporate resource is on-premises, on the web or in a hosted cloud, the access experience is consistent and seamless.

The installation of a VPN client comes with the Endpoint Control (EPC) engine. EPC ensures risks originating from users, endpoints or applications are evaluated before granting data access. Remediation actions, such as session quarantining and alerting, are enforced to minimize user frustration and reduce helpdesk calls.

Integration with the SonicWall Capture ATP, a cloud multi-engine sandbox, enables SMA to scan all files that users upload while outside the corporate network. The deep inspection of uploaded files ensures other users have the same level of protection from advanced threats (e.g., ransomware or zero-day malware) regardless of work locations.



SECURE ACCESS FROM UNMANAGED, PUBLIC AND BYOD DEVICES

The SMA 1000 series supports Zero-Trust Access via HTML5 web agents that are compatible with any browser. No VPN client is needed. Clientless or web-access is convenient because it provides instant support for any unmanaged devices.

It also provides a secure user portal to the most frequently used data types, and applies Least Privilege Access security, which permits users and devices to access only what's necessary and nothing more, like the concept of a "need to know basis." By limiting exposure to sensitive areas of the network, organizations can prevent threats from moving laterally, thereby securing their resources without sacrificing operational flexibility.

For mobile devices, the SMA 1000 series supports special policies to protect data at rest via SonicWall Mobile Connect. Authenticated users can securely browse, view intranet file shares and collaborate in a completely secure browser environment.




MANAGE A GLOBAL NETWORK OF SMA 1000 CLUSTERS WITH CMS

SonicWall CMS provides distributed enterprises and service providers with a powerful and intuitive solution to centrally manage and rapidly deploy SonicWall SMA 1000 appliances across networks and clouds.

CMS provides a turnkey solution to deliver a high degree of business continuity and scalability with Global High Availability (GHA), and zero downtime during peak hours by dynamically redistributing a pool of user licenses to the managed appliances based on real-time demand.

CMS also acts as a global data store that shares user session state across the mesh network of SMA appliances in an active-active cluster. This allows for session persistence across data centers around the world. In the event of a failover, users do not need to re-enter credentials, so their experience is frictionless, and productivity is not impacted.

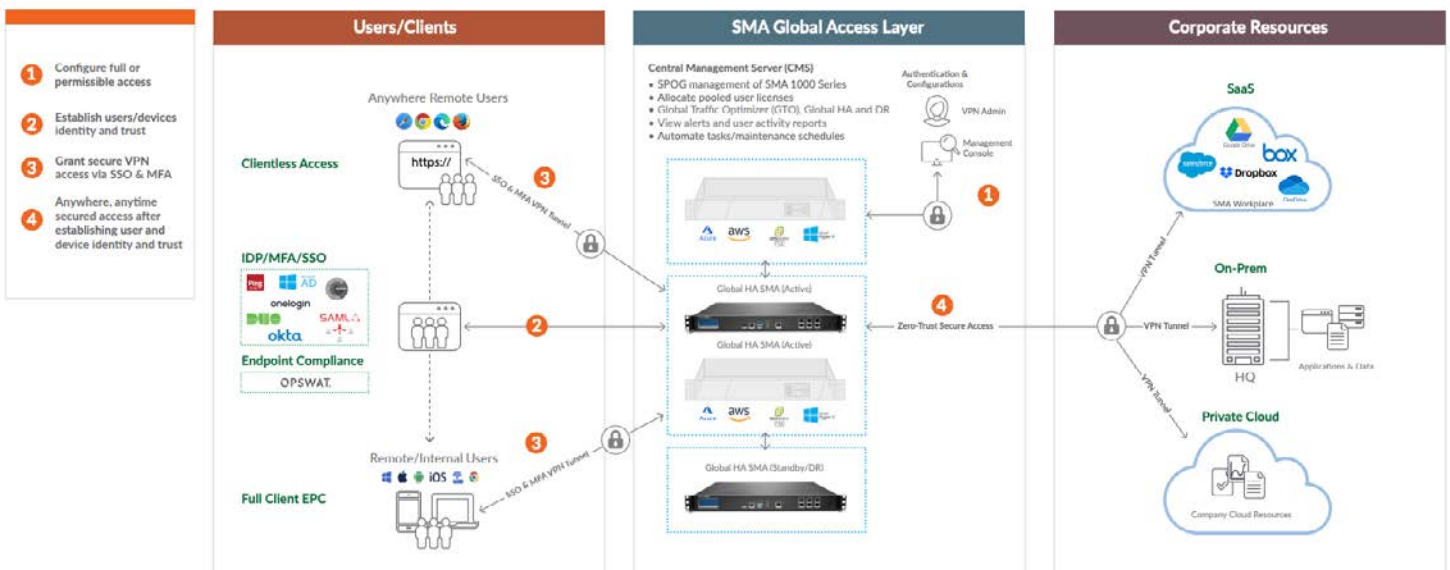

SMA 1000 series feature summary

Deployment

- Recommended SMA Firmware (v 12.4 onwards)
- Supported Hypervisors (VMware ESXi / Microsoft Hyper-V, KVM)
- Supported Public Clouds (AWS, Azure)

Client access

- Layer 3 tunnel
- Split-tunnel and redirect-all
- Always On VPN
- Auto ESP encapsulation
- HTML5 (RDP, VNC, ICA, SSH, Telnet, Network Explorer)
- Secure Network Detection
- File browser (CIFS/NFS)
- Citrix XenDesktop/XenApp
- VMware View
- On Demand tunnel
- Chrome/Firefox extensions
- CLI tunnel support
- Mobile Connect (iOS, Android, ChromeOS, Win 10, Mac OSX)
- Connect Tunnel (Intel/ ARM-powered Win10, Intel/ ARM-powered macOS, Linux)
- Exchange ActiveSync

Mobile access

- Per app VPN
- App control enforcement
- App ID validation

User portal

- Branding
- Customization
- Localization
- User defined bookmarks
- Custom URL support
- SaaS application support

Security

- FIPS 140-2
- TLS 1.3 support
- Suite B ciphers
- Dynamic EPC interrogation
- Role Based Access Control (RBAC)
- Endpoint registration

- Secure File Share (Capture ATP)
- Endpoint quarantine
- OSCP CRL validation
- Cipher selection
- PKI and client certificates
- Forward proxy
- Reverse proxy

Authentication and identity services

- SAML 2.0
- LDAP, RADIUS
- Kerberos (KDC)
- NTLM
- SAML Identity Provider (IdP)
- Biometric device support
- Face ID support for iOS
- Two-factor authentication (2FA)
- Multi-factor authentication (MFA)
- Chained authentication
- One Time Passcode (OTP) via email or SMS
- Common Access Card (CAC) support
- X.509 certificate support
- Captcha integration
- Remote password change
- Form-based SSO
- Federated SSO
- Session persistence
- Auto logon

Zero-Trust Security

- User verification (with 2FA, TOTP)
- Devices verification (with VPN per device, pre-login EPC)
- Context verification (with time-based access, continuous user and device monitoring via EPC)
- Least-Access Privilege Policy enforcement (with advanced ACL)
- Segmented App Access (with HTML5 bookmarks for RDP, HTTPS)

Access control

- Group AD
- LDAP attributes
- Continual endpoint monitoring

Management

- Management interface (ethernet)
- Management interface (console)
- HTTPS administration
- SSH administration
- SNMP MIBS
- Syslog and NTP
- Usage monitoring
- Configuration rollback
- Centralized management
- Centralized reporting
- Management REST APIs
- Authentication REST APIs
- RADIUS accounting
- Scheduled tasks
- Centralized session licensing
- Event-driven auditing

Networking

- IPv6
- Global load balancing
- Server load balancing
- TCP state replication
- Cluster state failover
- Active/passive high availability
- Active/active high availability
- Horizontal scalability
- Single or multiple FQDNs
- L3-7 smart tunnel proxy
- L7 application proxy

Integration

- 2FA TOTP support (Google Authenticator, MS Authenticator, DUO Security)
- EMM and MDM product support
- SIEM product support
- TPAM password vault
- Microsoft InTune support
- Let's Encrypt support

Licensing options

- Subscription based license
- Perpetual license with support
- Spike licensing
- Tiered licensing

Specifications - Physical appliance

Performance	SMA 6210	SMA 7210
Recommended firmware	Rev 12.4 onwards	Rev 12.4 onwards
Concurrent sessions/Users	Up to 2,000	Up to 10,000
SSL VPN Throughput* (at max CCU)	Up to 1.3 Gbps	Up to 5.0 Gbps
Form factor	1U	1U
Dimensions	17.0 x 16.5 x 1.75 in (43 x 41.5x 4.5 cm)	17.0 x 16.5 x 1.75 in (43 x 41.5x 4.5 cm)
Appliance weight	17.7 lbs (8 kgs)	18.3 lbs (8.3 kgs)
Encryption data acceleration (AES-NI)	Yes	Yes
Dedicated management port	Yes	Yes
SSL acceleration	Yes	Yes
Storage	2 x 1TB SATA; RAID 1	2 x 1TB SATA; RAID 1
Interfaces	(6)-port 1GE, (2) USB, (1) console	(6)-port 1GE, (2)-port 10Gb SFP+, (2) USB, (1) console
Memory	8GB DDR4	16GB DDR4
TPM chip	Yes	Yes
Processor	4 cores	4 cores
MTBF (@ 25°C or 77°F) in hours	70,127	129,601
Operations and Compliance	SMA 6210	SMA 7210
Power	Fixed power supply	Dual power supply, hot swappable
Input rating	100-240 VAC, 1.1 A	100-240 VAC, 1.79 A
Power consumption	77 W	114 W
Total heat dissipation	264 BTU	389 BTU
Environmental	WEEE, EU RoHS, China RoHS	
Non-operating shock	110 g, 2 msec	
Emissions	FCC, ICES, CE, C-Tick, VCCI; MIC	
Safety	UL, CE PSB, CCC, BSMI, CB scheme	
Operating temperature	0°C to 40°C (32°F to 104° F)	
FIPS certification	FIPS 140-2 Level 2 with anti-tamper protection	

Specifications - Virtual appliance

	SMA 8200v (ESX/ ESXi/ Hyper-V/ KVM)
Recommended firmware	Rev 12.4 onwards
Concurrent sessions	Up to 5000
SSL-VPN throughput*	Up to 1.58 Gbps
Allocated memory	8 GB
Processor	4 cores
SSL acceleration	Yes
Recommended disk size	240 GB
Operating system installed	Hardened Linux
Dedicated management port	Yes
FIPS certification	FIPS 140-2 Level 2

* Throughput performance may vary based on deployment and connectivity. Published numbers are based on internal lab conditions. SMA 8200v on Hyper-V scales up to 5000 concurrent sessions and provides up to 1.58 Gbps SSL-VPN throughput when running SMA OS 12.1/ 12.4 with Windows Server 2016/ 2019



PARTNER ENABLED SERVICES

Need help to plan, deploy or optimize your SonicWall solution? SonicWall Advanced Services Partners are trained to provide you with world class professional services. Learn more at:

www.sonicwall.com/PES

To learn how you can be more successful in maintaining a healthy access security environment while achieving zero downtime, visit:

sonicwall.com/products/remote-access

About SonicWall

[SonicWall](#) is a cybersecurity forerunner with more than 30 years of expertise and a relentless focus on its partners. With the ability to build, scale and manage security across the cloud, hybrid and traditional environments in real time, SonicWall can quickly and economically provide purpose-built security solutions to any organization around the world. Based on data from its own threat research center, SonicWall delivers seamless protection against the most evasive cyberattacks and supplies actionable threat intelligence to partners, customers and the cybersecurity community.



SonicWall, Inc.
1033 McCarthy Boulevard | Milpitas, CA 95035
Refer to our website for additional information.
www.sonicwall.com

SONICWALL®

© 2025 SonicWall Inc. ALL RIGHTS RESERVED.

SonicWall is a trademark or registered trademark of SonicWall Inc. and/or its affiliates in the U.S.A. and/or other countries. All other trademarks and registered trademarks are property of their respective owners. The information in this document is provided in connection with SonicWall Inc. and/or its affiliates' products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of SonicWall products. Except as set forth in the terms and conditions as specified in the license agreement for this product, SonicWall and/or its affiliates assume no liability whatsoever and disclaims any express, implied or statutory warranty relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or non-infringement. In no event shall SonicWall and/or its affiliates be liable for any direct, indirect, consequential, punitive, special or incidental damages (including, without limitation, damages for loss of profits, business interruption or loss of information) arising out of the use or inability to use this document, even if SonicWall and/or its affiliates have been advised of the possibility of such damages. SonicWall and/or its affiliates make no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. SonicWall Inc. and/or its affiliates do not make any commitment to update the information contained in this document.